


AR58

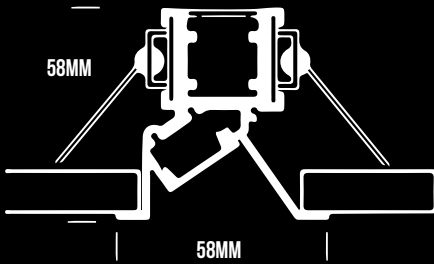

Features:

Recessed asymmetric wall-washer profile with 58mm of width.

Asymmetric lens highlights focused objects.

Continuous runs with uniform output, 100mm incremental length.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI85.

Remote driver.

100% recyclable, extruded architectural grade T6061 aluminium with 2mm minimum wall thickness.

Life: 50,000 hours L90/B10.

ITEM CODE	WATTAGE	COLOR TEMP	FINISH	LED LM
580225	25W	2700K	1000X58X58	1602LM/M
580325	25W	3000K	1000X58X58	1648LM/M
580425	25W	4000K	1000X58X58	1702LM/M

Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.



Applications

Offices, hospitality, schools, art galleries, museums, halls, hospitals, malls, accent lighting, retails.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming

- **CRI 95+**

- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K

- **Individual luminaire or continuous runs**

- **Customised wattages**

- **RGB LED boards**

- **Emergency modules**

- **Bends**