



AS25

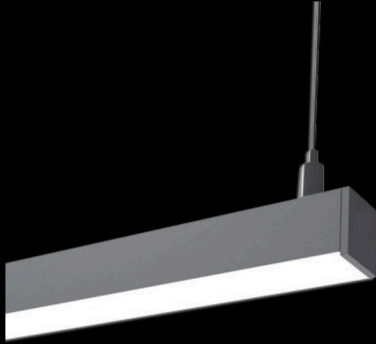

Features:

Surface or suspended profile with 25mm of width.

Asymmetric lens highlights focused objects.

Continuous runs with uniform output, 100mm incremental length.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI85.

Remote driver.

Extruded architectural grade T6061 aluminium, 100% recyclable.

Life: 50,000 hours L90/B10.

ITEM CODE	WATTAGE	COLOR TEMP	MIN LMM	LED LM
250221	21W	2700K	1000X25X29	1751LM/M
250321	21W	3000K	1000X25X29	1786LM/M
250421	21W	4000K	1000X25X29	1826LM/M

Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.



Applications

Offices, hospitality, schools, art galleries, museums, hospitals, malls, accent lighting, retails and large indoor open areas.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming
- **CRI 95+**

- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K

- **Individual luminaire or continuous runs**

- **Customised wattages**

- **RGB LED boards**

- **Emergency modules**