



# AS63

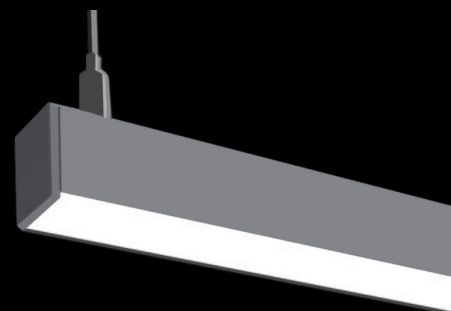

| ITEM CODE | WATTAGE | COLOR TEMP | CRI (MIN) | LED IM   |
|-----------|---------|------------|-----------|----------|
| 630233    | 33W     | 2700K      | 63 X 80   | 2541LM/M |
| 630333    | 33W     | 3000K      | 63 X 80   | 2604LM/M |
| 630433    | 33W     | 4000K      | 63 X 80   | 2666LM/M |

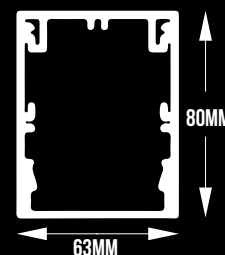

## Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.



## Applications

Offices, hospitality, schools, art galleries, museums, hospitals, malls, accent lighting, retails and large indoor open areas.

## Options

- **Dimming:** DALI and DSI dimming  
1-10V dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages**
- **RGB LED boards**
- **Emergency modules**
- **Wall mount and suspension brackets**

## Features:

Surface or suspended profile with 63mm of width.

Asymmetric lens highlights focused objects.

Continuous runs with uniform output, 100mm incremental length.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI85.

Integral driver.

Extruded architectural grade T6061 aluminium, 100% recyclable.

Life: 50,000 hours L90/B10.