



# Atlantis

## Street Light

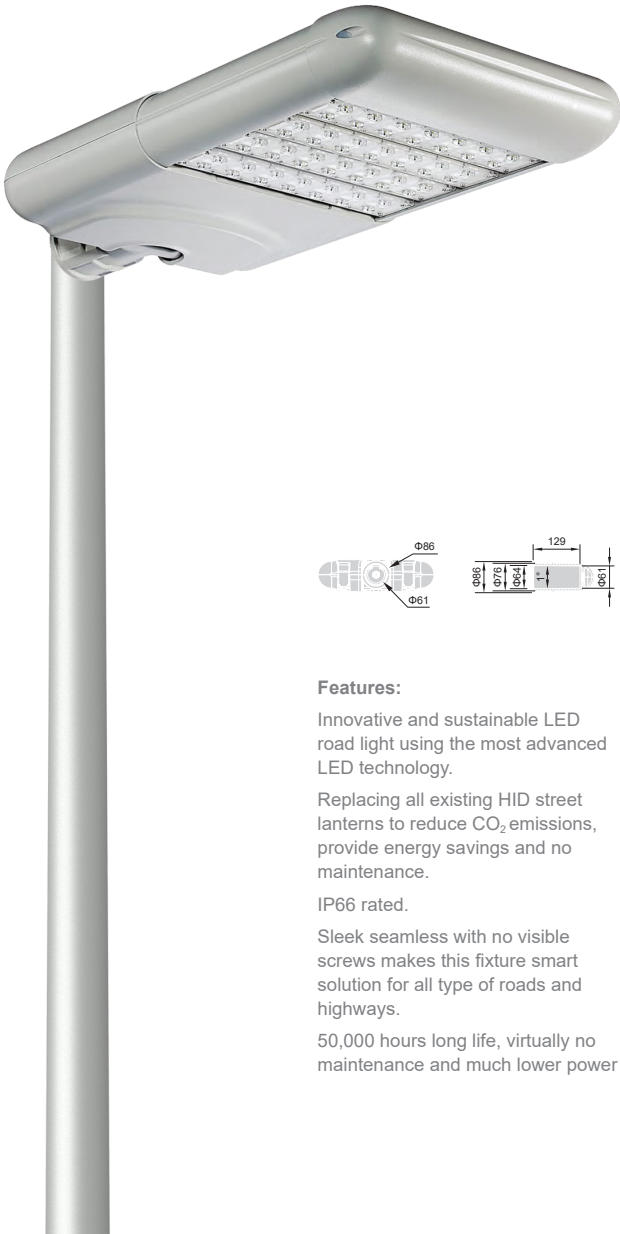

**Features:**


Innovative and sustainable LED road light using the most advanced LED technology.

Replacing all existing HID street lanterns to reduce CO<sub>2</sub> emissions, provide energy savings and no maintenance.

IP66 rated.

Sleek seamless with no visible screws makes this fixture smart solution for all type of roads and highways.

50,000 hours long life, virtually no maintenance and much lower power

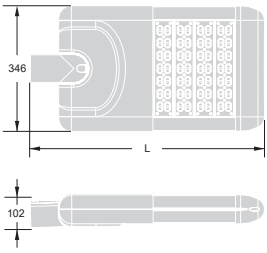

consumption provides huge cost saving for longer periods.

Built-in chimney effect heat dissipation structure with self cleaning function.

High resolution specially designed optically controlled lenses with each LED source to precisely control the light output.

Supplied in 5000K cool white as standard, other colour temperatures available on request.

Dimming and photocell options available for extended energy savings.

Overall uniformity and longitudinal uniformity makes Atlantis the best choice of designers and authorities.

Fully adjustable beam angles for orientation and tilt to best suit the design.

Suitable for various arm bracket combinations.

Equipped with adjustable side bracket as standard.

Atlantis to replace 150W HID, 250W HID, 400W HID and 600W HID conventional street lanterns.

**Applications:**

All types of Road Surfaces, Single, Double Carriage Roads, Highways, Pathways, Car Parkings and Amenity Lighting.

**Materials/Finish:**

High quality die cast aluminium alloy body with corrosion resistance powder coated paint finish to RAL 9006. Other colours available on request, IP66 rated sealed LED modules with extruded aluminium heat sink.

# Atlantis Street Light



Item Code	771033	771062	771093	771123	771154	771185	771216	771246	771277	771308
Wattage	33W	62W	93W	123W	155W	185W	216W	246W	277W	308W
Beam Angle	A2/A3/S1	A2/A3/S1	A2/A3/S1	A2/A3/S1	A2/A3/S1	A2/A3/S1	A2/A3/S1	A2/A3/S1	A2/A3/S1	A2/A3/S1
Colour Temp.	5000K	5000K	5000K	5000K	5000K	5000K	5000K	5000K	5000K	5000K
LED lm	3100lm	5800lm	8800lm	12300lm	15500lm	18500lm	21600lm	24600lm	27700lm	30800lm
Dim.(mm)	502 x 346	564 x 346	626 x 346	688 x 346	750 x 346	812 x 346	874 x 346	936 x 346	998 x 346	1060 x 346

\* Specify for other colour temperatures.

\* A2/A3/S1 various lens options as per project requirement.