


Camelus I Bollard

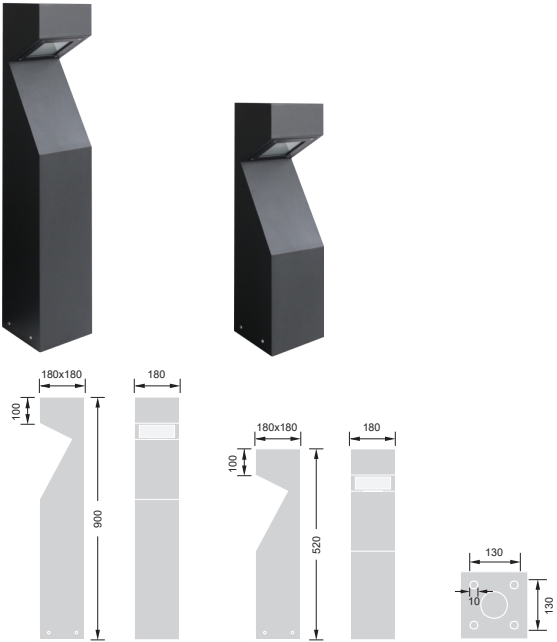

Item Code	995430	996445
Wattage	30W	45W
Beam Angle	30°	30°
Colour Temp.	4000K	4000K
LED lm	2800lm	4300lm
Dim.(mm)	180 x 520	180 x 900

* Specify for other colour temperatures.

Materials/Finish:

Extruded aluminium and die-cast aluminium housing with high corrosion resistance.

Features:

- Robust 30W and 45W LED bollard light.
- Unique shape direct/indirect bollard light to enhance the ambience of pathways and gardens.
- 3mm thickness tempered glass.
- Standard stainless steel fastness part.
- High purity aluminium heat sink conduction piece available in two different heights.
- Fire-resistant silicon seal gasket.

- No light loss, zero upward lighting avoiding light pollution.
- Fixture supplied with flange base as standard, anchor bolts kit optional.
- 4000K colour temperature as standard.
- Available colours 3000K, 4000K, 5000K and 6000K optional.
- No IR, No Mercury.
- 50,000 hours long life, low maintenance.

Applications:

- Gardens, Pathways, Walkways, Landscapes, Approach Light, Entrances and Amenity.