


Camelus

Bollard



Item Code	993423	994423
Wattage	23W	23W
Beam Angle	30°	30°
Colour Temp.	4000K	4000K
LED lm	1710lm	1845lm
Dim.(mm)	150 x 520	150 x 680

* Specify for other colour temperatures.

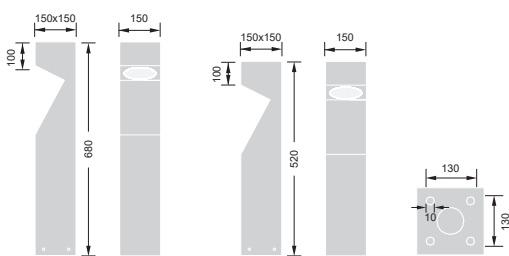

Features:

- Robust 23W LED bollard light.
- Unique shape direct/indirect bollard light to enhance the ambience of pathways and gardens.
- 3mm thickness tempered glass.
- Standard stainless steel fastness part.
- High purity aluminium heat sink conduction piece available in two different heights.
- Fire-resistant silicon seal gasket.
- No light loss, zero upward lighting avoiding light pollution.

Fixture supplied with flange base as standard, anchor bolts kit optional.

- 4000K colour temperature as standard.
- Available colours 3000K, 4000K, 5000K and 6000K optional.
- No IR, No Mercury.
- 50,000 hours long life, low maintenance.

Applications:

- Gardens, Pathways, Walkways, Landscapes, Approach Light, Entrances and Amenity.

Materials/Finish:

Extruded aluminium and die-cast aluminium housing with high corrosion resistance.