


Ciro

Wall & Ceiling

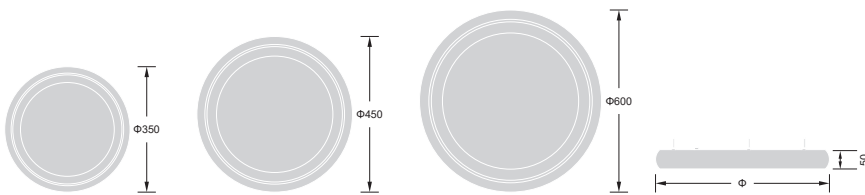

	CRI 85	Ta 45°C	V 240	IP 40		
--	-----------	------------	----------	----------	--	--

Item Code	991418	991430	991450
Wattage	18W	30W	50W
Beam Angle	120°	120°	120°
Colour Temp.	4000K	4000K	4000K
LED lm	1500lm	2550lm	4250lm
Dim.(mm)	Φ350 x 50	Φ450 x 50	Φ600 x 50

* Specify for other colour temperatures.

Materials/Finish:

Die cast aluminum housing with durable UV stabilized opal diffuser.

Dimming Options:

DSI & DALI dimming.
1~10 V dimming.

Features:

Sleek round profile surface with exquisite design and glare free.
High luminous efficacy.
High CRI >85.
MacAdam ellipse 2 ensure colour consistency.
Excellent uniformity with smooth lighting distribution.
Twist and lock diffuser system.
Multiple variants of different wattages and sizes.
18W (350mm dia)

30W (450mm dia)
50W (600mm dia)
Customized wattages available on request.
Choice of built-in or remote driver for recessed applications.
Robust IK10 (PC) and IK06 (PMMA).
4000K colour temperature as standard.
Available colours 3000K, 4000K, 5000K and 6000K optional.
No IR, No Mercury.

50,000 hours long life, low maintenance.

Applications:

Circular pendant luminaire for soft direct lighting.
Office Receptions, Restaurants, Recreation Areas, Lobbies, Meeting Rooms and Contemporary Living Areas.