


Comfort Recessed



Item Code	115442	115444
Wattage	42W	44W
Beam Angle	125°	125°
Colour Temp.	4000K	4000K
LED lm	4300lm	4300lm
Dim.(mm)	595 x 595	1195 x 295

* Specify for other colour temperatures.

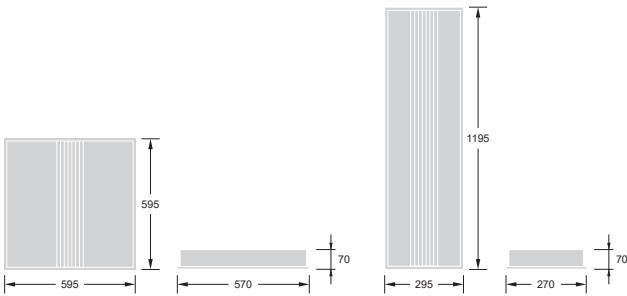

Features:

- Ideal LED recessed fixture for numerous applications.
- Excellent uniformity with more than 90% LOR.
- High luminous efficacy.
- Sheet steel aluminium housing powder coated white.
- Durable UV stabilized acrylic soft light prismatic diffuser.
- No light spill from back or sides.
- Integral LED driver.
- Highly bright uniform light output.

- 60% energy saving.
- No Maintenance.
- 4000K colour temperature as standard.
- Available colours 3000K, 4000K, 5000K and 6000K optional.
- No IR, No Mercury.
- 50,000 hours long life, low maintenance.
- Compatible with various dimming control systems.
- Direct replacement of T5 and T8 fixtures.

Optional self contained or central battery emergency lighting versions available on request.

*Standard product suitable for exposed "T" grid ceilings, specify for other ceiling types at ordering.

Applications:

Offices, Retail, Hospitals, Schools and Large Indoor Open Areas.

Materials/Finish:

Sheet steel aluminium housing powder coated white. Durable UV stabilized acrylic soft light prismatic diffuser.

Dimming Options:

DSI & DALI dimming.
1~10 V dimming.