


Indi I Recessed

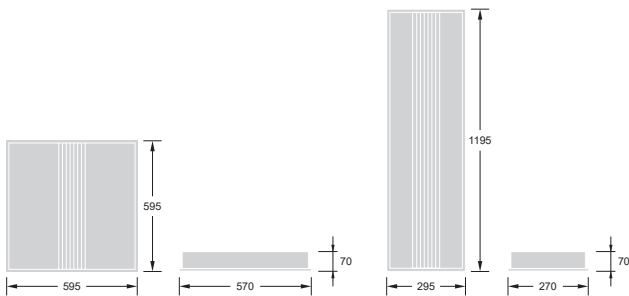

Item Code	116442	116444
Wattage	42W	44W
Beam Angle	125°	125°
Colour Temp.	4000K	4000K
LED lm	4300lm	4300lm
Dim.(mm)	595 x 595	1195 x 295

* Specify for other colour temperatures.

Applications:

Offices, Retails, Hospitals, Schools and Large Indoor Open Areas.

Materials/Finish:

Sheet steel housing powder coated white. Durable UV stabilized acrylic soft light diffuser.

Dimming Options:

DSI & DALI dimming.
1~10 V dimming.

Features:

Curved anti-glare opal diffuser for direct flash indirect light output.
Excellent uniformity with more than 90% LOR.
High luminous efficacy.
Sheet steel aluminium housing powder coated white.
Durable UV stabilized acrylic soft light diffuser.
No light spill from back or sides.
Integral LED driver.
Highly bright uniform light output.

60% energy saving.

No Maintenance.

4000K colour temperature as standard.

Available colours 3000K, 4000K, 5000K and 6000K optional.

No IR, No Mercury.

50,000 hours long life, low maintenance.

Compatible with various dimming control systems.

Direct replacement of T5 and T8 fixtures.

Optional self contained or central battery emergency lighting versions available on request.

*Standard product suitable for exposed "T" grid ceilings, specify for other ceiling types.