


Indi II Recessed

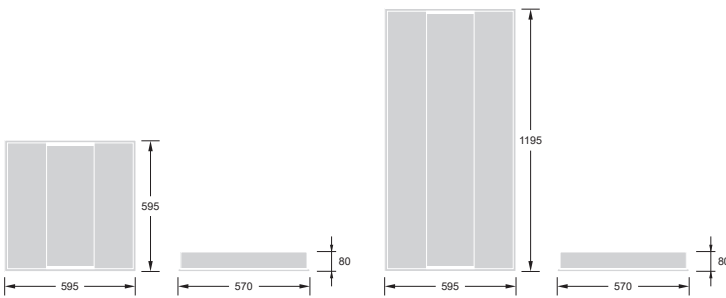

Item Code	116438	116450
Wattage	38W	50W
Beam Angle	120°	120°
Colour Temp.	4000K	4000K
LED lm	4300lm	5600lm
Dim.(mm)	595 x 595	1195 x 595

* Specify for other colour temperatures.

Applications:

Offices, Retails, Hospitals, Schools and Large Indoor Open Areas.

Materials/Finish:

Sheet steel aluminium housing powder coated white. Durable UV stabilized acrylic soft light diffuser.

Dimming Options:

DSI & DALI dimming.
1~10 V dimming.

Features:

- Excellent uniformity with more than 90% LOR.
- High luminous efficacy.
- Sheet steel aluminium housing powder coated white.
- Durable UV stabilized acrylic soft light diffuser with large area for wider distribution of light
- No light spill from back or sides.
- Integral LED driver.
- Highly bright uniform light output.
- 60% energy saving.

No Maintenance.

- 4000K colour temperature as standard.
- Available colours 3000K, 4000K, 5000K and 6000K optional.
- No IR, No Mercury.
- 50,000 hours long life, low maintenance.
- Compatible with various dimming control systems.
- Direct replacement of T5 and T8 fixtures.
- Optional self contained or central

battery emergency lighting versions available on request.

*Standard product suitable for exposed "T" grid ceilings, specify for other ceiling types.