


Mellow Recessed

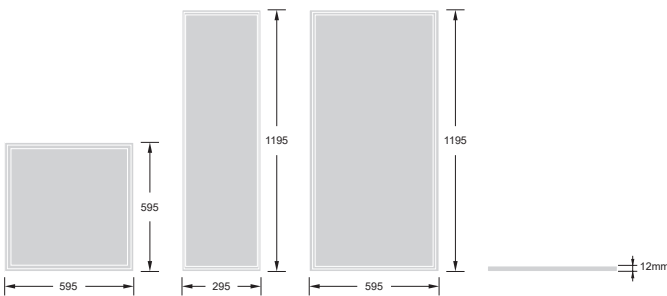

Features:

- Recessed ultra slim LED panel fixture with edge lit technology.
- Highly uniform non-glare frosted diffuser for high output technology with large visible area.
- Laser printed PMMA light guide with 95% reflective film.
- Ideal replacement to meet today's energy saving requirements and mandatory regulations by various authorities.
- Highly bright uniform light output. 60% energy saving.

- No Maintenance.
- 5000K colour temperature as standard.
- Available colours 4000K, 5000K and 6000K optional.
- No IR, No Mercury.
- 50,000 hours long life, low maintenance.
- Compatible with various dimming control systems and all false ceiling types.
- Optional self contained or central battery emergency lighting versions available on request.

*Standard product suitable for exposed "T" grid ceilings, specify for other ceiling types at ordering.

	CRI 85	Ta 40°C	V 240	IP 40		
--	-----------	------------	----------	----------	--	--

Item Code	225042	225142	225065
Wattage	42W	42W	65W
Beam Angle	112°	112°	112°
Colour Temp.	5000K	5000K	5000K
LED lm	3600lm	3600lm	5550lm
Dim.(mm)	595 x 595	295 x 1195	595 x 1195

* Specify for other colour temperatures.

Applications:

Offices, Meeting Rooms, Clean Areas, Hospitals, Laboratories, Class Rooms and Large Corridors.

Materials/Finish:

Extruded aluminium housing frame with smooth profile, durable UV stabilised diffuser.

Dimming Options:

DSI & DALI dimming.
1~10 V dimming.