


# Mitco I

Fixed

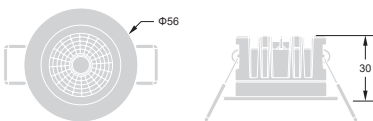

Ø50mm

Item Code	664306	664406
Wattage	6W	6W
Beam Angle	20°	40°
Colour Temp.	3000K	4000K
LED lm	411lm	444lm
Dim.(mm)	Φ56 x 30	Φ56 x 30

\* Specify for other colour temperatures.

### Features:

- Recessed down light with low depth profile.
- Suitable for low depth ceilings.
- IP65 rated suitable for wet locations.
- High purity aluminum reflector, available with narrow 20° or medium 40° beam angle.
- Die cast aluminium housing and heat sink.
- Specially designed heat sink for better heat management.
- Sealed aperture and integral gasket prevent dust and water.

Frosted lens as an option, no glare and uniform distribution.

- New generation of COB LEDs with higher efficiency DLOR.
- Colour rendering index: Ra90.
- MacAdam ellipse 2 ensure colour consistency.
- 3000K and 4000K colour temperature as standard.
- Pre-wired remote driver with push and lock connectors.
- Tools free installation.
- 50,000 hours life L70.

### Applications:

Ideal to use in External Eaves, Wet Locations, Shower Area, Toilets, Kitchens, Cold Storage and Corridors.

### Materials/Finish:


Die cast aluminium body and heat sink, high purity aluminium reflector complete with UV stabilised clear or frosted lens.

### Dimming Options:

Leading and trailing edge mains dimmable.  
 DSI & DALI dimming.  
 1~10 V dimming.

# Mitco II

## Adjustable

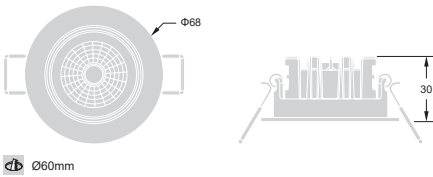

Item Code	665306	665406
Wattage	6W	6W
Beam Angle	20°	40°
Colour Temp.	3000K	4000K
LED lm	411lm	444lm
Dim.(mm)	Φ68 x 30	Φ68 x 30

\* Specify for other colour temperatures.

### Materials/Finish:

Die cast aluminium body and heat sink, high purity aluminium reflector complete with UV stabilised clear or frosted lens.

### Dimming Options:

Leading and trailing edge mains dimmable.

DSI & DALI dimming.

1~10 V dimming.

### Features:

Recessed down light with low depth profile.

Suitable for low depth ceilings.

High purity aluminum reflector, available with narrow 20° or medium 40° beam angle.

Die cast aluminium housing and heat sink.

Specially designed heat sink for better heat management.

Frosted lens as an option, no glare and uniform distribution.

New generation of COB LEDs with higher efficiency DLOR.

Colour rendering index: Ra90.

MacAdam ellipse 2 ensure colour consistency.

3000K and 4000K colour temperature as standard.

Pre-wired remote driver with push and lock connectors.

Tools free installation.

50,000 hours life L70.

### Applications:

Ideal to use in Lift Lobby, Corridors, Hotels, Apartments, Restaurants, Reception and Entrance Areas.