

Nik II




Adjustable Under Water



	IK 06	CRI 80	Ta 40°C	V 24DC	IP 68		
--	-------	--------	---------	--------	-------	--	--

Item Code	660460	660412	660424
Wattage	6W	12W	24W
Beam Angle	15°	15°	15°
Colour Temp.	4000K	4000K	4000K
LED lm	321lm	600lm	1219lm
Dim.(mm)	Ø113 x 113	Ø153 x 163	Ø180 x 199

* Specify for other colour temperatures.

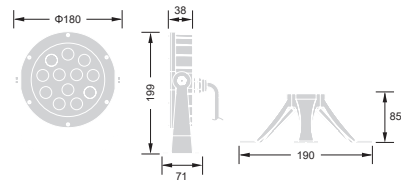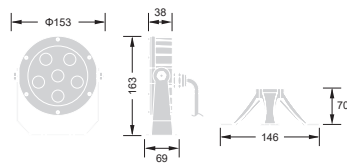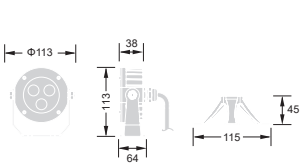

Features:

Surface round adjustable under water LED projectors in stainless steel for 6W, 12W and 24W LED floods.

316 stainless steel trim and body for longevity and can withstand high humidity, acid, alkali site with harsh weather conditions.

Tripode SS base for fixed bolted installation.

Adjustable round head with option of pre-set angled head frame.

Tempered 5mm thick glass diffuser.

Cable Gland: IP-68 PG-11 Copper with Nickel coated.

4000K colour temperature as standard.

Available colours 3000K, 4000K, 5000K and 6000K optional.

Remote driver for 24V DC version.

No IR, No Mercury.

50,000 hours long life, low maintenance.

Applications:

Ideal for both Indoor/Outdoor Applications, Swimming Pools, Water Fountains, Lighting Building and Landscape Areas.

Materials/Finish:

Body and trim 316 stainless steel, tempered 5mm thick glass diffuser.