

# Oceanic II

Inground / Submersible




Item Code	660312	660318
Wattage	12W	18W
Beam Angle	30°	30°
Colour Temp.	3000K	3000K
LED lm	1010lm	1490lm
Dim.(mm)	Ø205 x 126	Ø250 x 126

\* Specify for other colour temperatures.  
\* Specify AS for asymmetric lens.

### Materials/Finish:

Body and trim 316 stainless steel, tempered 10mm thick glass diffuser.

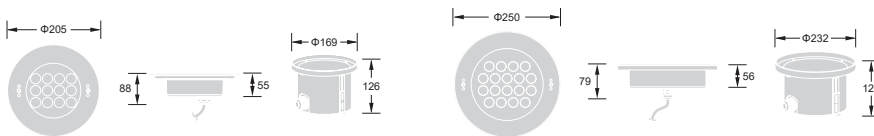

### Features:

Inground/Submersible under water stainless steel IP68 12W/18W LED uplight.

316 stainless steel trim and body for longevity and can withstand high humidity, acid, alkali site with harsh weather conditions.

SS trim is completely in line with the tempered glass.

Tempered 10mm thick glass diffuser.

Cable Gland: IP-68 PG-11 Copper with Nickel coated.

3000K colour temperature as

standard.

Available colours 3000K, 4000K, 5000K and 6000K optional.

Remote driver for 24V DC version.

No IR, No Mercury.

50,000 hours long life, low maintenance.

### Applications:

Ideal for both Indoor/Outdoor Applications, Swimming Pools, Water Fountains, Lighting Building and Landscape Areas.