


Oceanic I

Inground / Submersible



Item Code	660330	661330
Wattage	3W	3W
Beam Angle	30°	45°
Colour Temp.	3000K	3000K
LED lm	174lm	143lm
Dim.(mm)	Ø70 x 135	Ø70 x 135

* Specify for other colour temperatures.
* Specify AS for asymmetric lens.

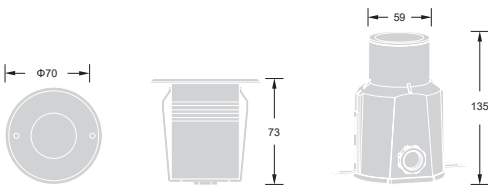

Features:

Inground/Submersible under water stainless steel IP68 3W LED uplight.
316 stainless steel trim and body for longevity and can withstand high humidity, acid, alkali site with harsh weather conditions.
SS trim is completely in line with the tempered glass.
Tempered 7mm thick glass diffuser.
Cable Gland: IP-68 PG-11 Copper with Nickel coated.
3000K colour temperature as standard.

Available colours 3000K, 4000K, 5000K and 6000K optional.
Remote driver for 24V DC version.
No IR, No Mercury.
50,000 hours long life, low maintenance.

Applications:

Ideal for both Indoor/Outdoor Applications, Swimming Pools, Water Fountains, Lighting Building and Landscape Areas.

Materials/Finish:

Body and trim 316 stainless steel, tempered 7mm thick glass diffuser.