


Panther

Recessed IP65

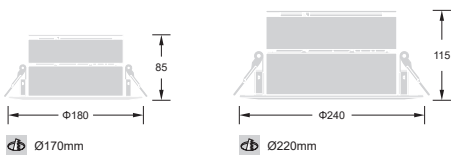

	CRI 85	Ta 45°C	V 240	IP 65		
--	-----------	------------	----------	----------	--	--

Item Code	775416	775425
Wattage	16W	25W
Beam Angle	90°	90°
Colour Temp.	4000K	4000K
LED lm	1280lm	2000lm
Dim.(mm)	Φ180 x 85	Φ240 x 115

* Specify for other colour temperatures.

Applications:

Atriums, Entrance Lobbies,
Restaurants, Canopies.

Materials/Finish:

Extruded aluminum housing with
durable UV stabilized opal diffuser.

Dimming Options:

DSI & DALI dimming.
1~10 V dimming.

Features:

- Highly efficient ceiling recessed circular LED down light.
- Opal diffuser provides glare free broad and even light distribution.
- High luminous efficacy, high CRI 85+.
- Extruded aluminium housing act as heat sink.
- Aluminium structure provides better heat thermal management system.
- MacAdam ellipse 2 ensure colour consistency.
- Multiple variants of different

wattages and sizes.

- 16W (180mm dia)
- 25W (240mm dia)
- 4000K colour temperature as standard.
- Available colours 3000K, 4000K, 5000K and 6000K optional.
- No IR, No Mercury.
- 50,000 hours long life, low maintenance.

