
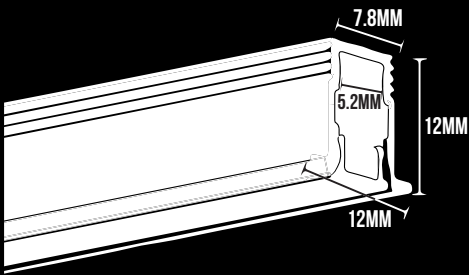


# R12

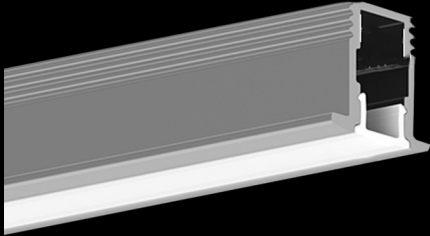

### Features:

- Sleek modern design aluminium profile with 12mm of width.
- Versatile profile suitable for recessed applications.
- Provides continuous, dot-free homogeneous light output.
- Superior quality components for optimum performance.
- Clean-cut magnetic end-caps, no screws.
- Seamless joints with speedy connectors.
- Plug and play system with factory fitted components for quick installation.
- High quality LED modules with CRI85.
- Remote driver.
- Incremental length 50mm.
- Life: 50,000 hours L90/B10.

ITEM CODE	WATTAGE	COLOR TEMP	MIN. LUMEN	LED IM
120210	10W	2700K	1000 X 12 X 12	680LM/M
120310	10W	3000K	1000 X 12 X 12	750LM/M
120410	10W	4000K	1000 X 12 X 12	800LM/M

### Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.



### Applications

Offices, hospitality, schools, hospitals, malls, accent lighting, retails.

### Options

- **Dimming:** DALI and DSI dimming 1-10V dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages**
- **RGB LED boards**
- **Emergency modules**

### Accessories

