
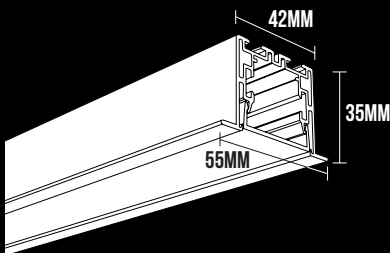


R55

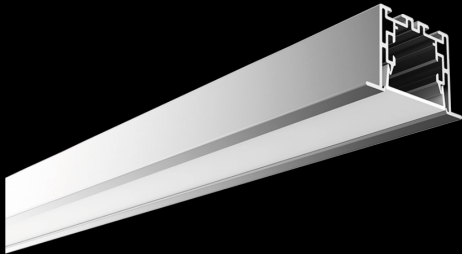

Features:

Sleek modern design aluminium profile with 55mm of width.

Versatile profile suitable for recessed applications.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Clean-cut magnetic end-caps, no screws.

Seamless joints with speedy connectors.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI85.

Remote driver.

Incremental length 50mm.

Life: 50,000 hours L90/B10.

ITEM CODE	WATTAGE	COLOR TEMP	DIM. (MM)	LED IM
551220	20W	2700K	1000 X 55 X 35	1710LM/M
551320	20W	3000K	1000 X 55 X 35	1770LM/M
551420	20W	4000K	1000 X 55 X 35	1820LM/M

Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.



Applications

Offices, hospitality, schools, hospitals, malls, accent lighting, retails, large indoor open areas.

Options

- Dimming: DALI and DSI dimming
1-10V dimming
- CRI 95+

- Color Temperatures : 2700K, 3000K, 4000K, 5000K and 6000K

- Individual luminaire or continuous runs

- Customised wattages

- RGB LED boards

- Emergency modules

- Bends:

