





RI70

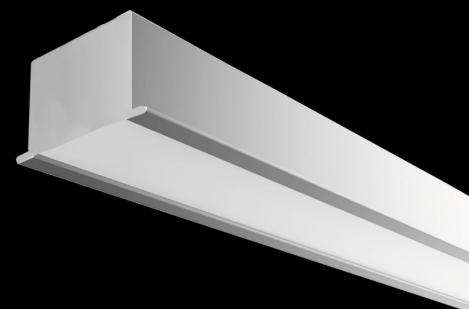

ITEM CODE	WATTAGE	COLOR TEMP	DIM (MM)	LED IM
702225	25W	2700K	1000 X 70 X 75	2240LM/M
702325	25W	3000K	1000 X 70 X 75	2300LM/M
702425	25W	4000K	1000 X 70 X 75	2400LM/M

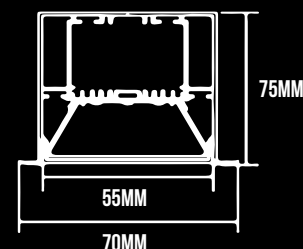

Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.



Applications

Offices, hospitality, schools, hospitals, malls, accent lighting, retails, large indoor open areas.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages**
- **RGB LED boards**
- **Emergency modules**
- **UGR<19 compliant profile**
- **Bends:**



Features:

Sleek modern design aluminium profile with 70mm of width.

UGR <19 compliant profiles as an option for working environment.

Versatile profile suitable for recessed applications.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Clean-cut magnetic end-caps, no screws.

Seamless joints with speedy connectors.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI85.

Integral driver.

Incremental length 50mm.

Life: 50,000 hours L90/B10.