
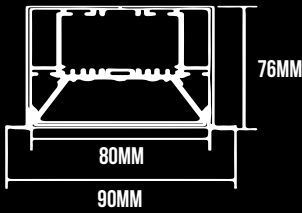


# RI90

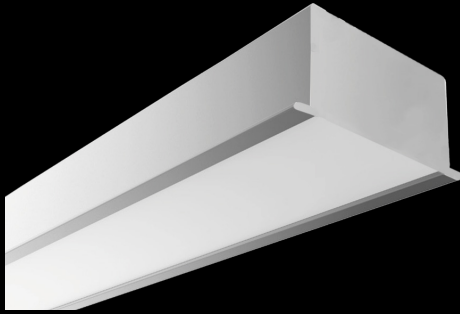

ITEM CODE	WATTAGE	COLOR TEMP	MIN LUMEN	LED IM
902230	30W	2700K	1000 X 90 X 76	2490LM/M
902330	30W	3000K	1000 X 90 X 76	2550LM/M
902430	30W	4000K	1000 X 90 X 76	2600LM/M

## Features:

Sleek modern design aluminium profile with 90mm of width.

UGR <19 compliant profiles as an option for working environment.

Versatile profile suitable for recessed applications.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Clean-cut magnetic end-caps, no screws.

Seamless joints with speedy connectors.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI85.

Integral driver.

Incremental length 50mm.

Life: 50,000 hours L90/B10.

## Materials

Extruded aluminium profiles with high quality durable UV stabilized diffuser.



## Applications

Offices, hospitality, schools, hospitals, malls, accent lighting, retails, large indoor open areas.

## Options

- **Dimming:** DALI and DSI dimming  
1-10V dimming

- **CRI 95+**

- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K

- **Individual luminaire or continuous runs**

- **Customised wattages**

- **RGB LED boards**

- **Emergency modules**

- **UGR<19 compliant profile**

- **Bends:**

