




# RTL195



ITEM CODE	WATTAGE	COLOR TEMP	DIM. (MM)	LED IM
1953418	4X18W	3000K	1000X157X159	4X1890LM
1953426	4X26W	3000K	1000X157X159	4X3170LM
1953439	4X39W	3000K	1000X157X159	4X4320LM
1953450	4X50W	3000K	1000X157X159	4X5170LM

## Materials




100% recyclable extruded architectural grade T6061 aluminium.  
 BK - Black powdercoat  
 WH - White powdercoat  
 RAL - Specify RAL powdercoat code (ex: #RAL/3003)

## Applications

Hospitality, schools, art galleries, museums, hospitals, malls, accent lighting, retails and large indoor open areas.

## Options

- **Dimming:** DALI or Triac dimming  
1-10v dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages**
- **Beam Angle:** 15°, 24°, 48°
- **Emergency modules**

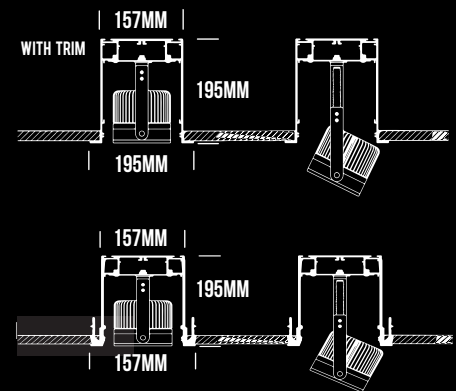

- Yoke rotates 360°
- Head extend 25mm
- Head pivots 180°

## Features:

Unique recessed 195mm profile, retractable spots with trim or trimless options.

Available in 0.5m, 1m, 1.2m, 1.5m, 1.8m, 2.4m lengths.

Two spots for 0.5m and four spots for 1m length.

Standard beam angle 38°.

Extendable pivot up to 25mm.

Adjustable spot heads 180 degree.

Trimless profile for clean ceiling applications.

Life: 50,000 hours L90/B10.