
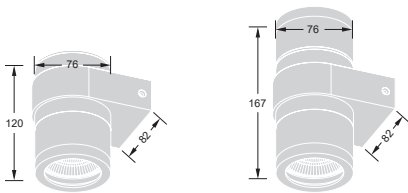
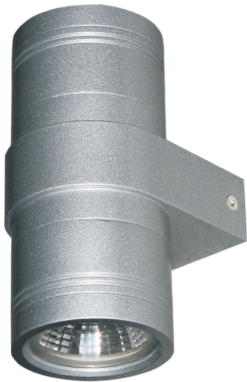


Rome

Up / Down

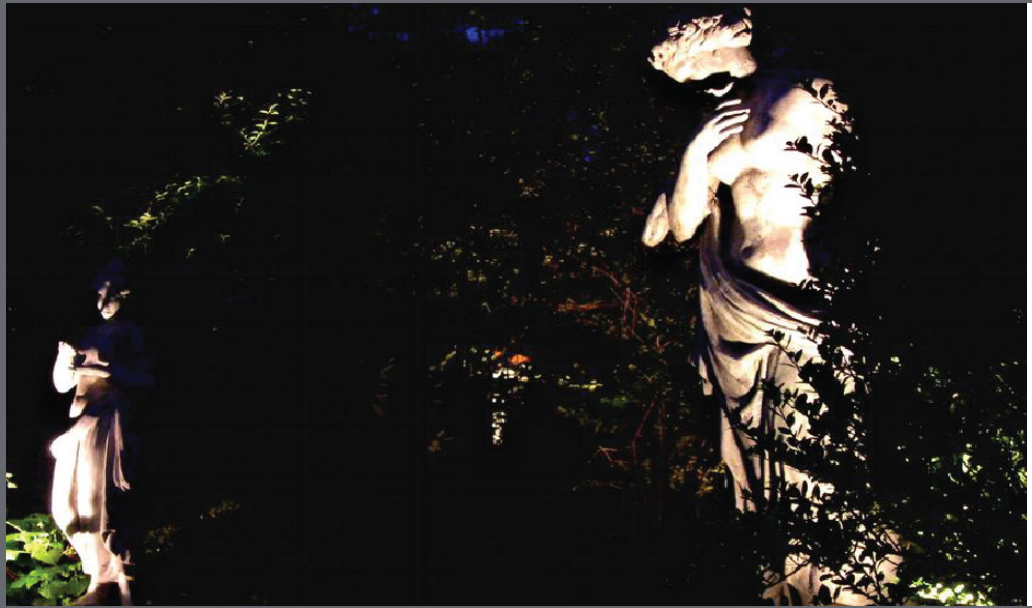

Item Code	993410	993420
Wattage	1 x 10W	2 x 10W
Beam Angle	30°	30°
Colour Temp.	4000K	4000K
LED lm	720lm	1222lm
Dim.(mm)	76 x 120	76 x 167

* Specify for other colour temperatures.

Materials/Finish:

Body in high grade cast aluminium powder coated paint, 316 stainless steel screws, IP65 rated 6mm tempered safety glass with mounting base.

Features:

Rigid IP65 cylindrical wall light with one side or two side up/down illumination.

Stainless steel screws with die cast aluminium body and bracket.

Choice of various body colours.

6mm tempered safety glass.

Optical reflector efficiency >80% with COB LED.

4000K colour temperature as standard.

Available colours 3000K, 4000K, 5000K and 6000K optional.

No IR, No Mercury.

50,000 hours long life, low maintenance.

Applications:

Ideal to use for Facade Columns, Pillars, Exterior Walls and All Outdoor Applications.