


S7

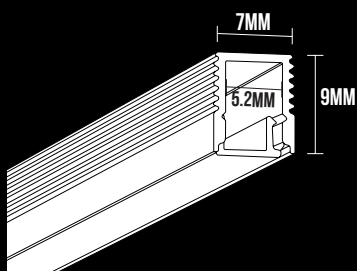

**Features:**

- Surface mount super slim profile width 7mm.
- 2 step MacAdam ellipse for highest colour consistency.
- High quality extruded aluminium profiles.
- Frosted lens for uniform and smooth illumination.
- Dot free, continuous homogeneous lighting effect.
- 50mm incremental length, continuous runs.
- Remote 24V driver, single driver for multiple lengths, cost effective solution.
- Life: 50,000 hours L90/B10.
- Easy to install with mounting brackets.

ITEM CODE	WATTAGE	COLOR TEMP	SLIM (MM)	LED IM
711210	10W	2700K	1000 X 7 X 9	680LM/M
711310	10W	3000K	1000 X 7 X 9	750LM/M
711410	10W	4000K	1000 X 7 X 9	800LM/M

**Materials**

- Extruded aluminium profiles with durable UV stabilized diffuser.
- FINISH Silver

**Applications**

Joinery lighting, cabinet lighting, display lighting, cove lighting, accent and indirect lighting.

**Options**

- Dimming: DALI and DSI dimming 1-10V dimming
- CRI 95+
- Color Temperatures : 2700K, 3000K, 4000K, 5000K and 6000K
- Individual luminaire or continuous runs
- Customised wattages
- RGB LED boards
- Emergency modules

**Accessories**

