


SP150

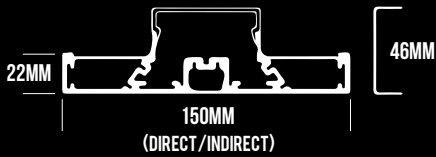

Features:

Sleek suspended profile with 150mm width for direct/indirect lighting distribution.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

2x25W LED board for upward and downward illumination.

Plug and play system with factory fitted components for quick installation.

Integral driver.

Incremental lengths 100mm.

Seamless joints with speedy connectors.

Life: 50,000 hours L90/B10.

ITEM CODE	WATTAGE	COLOR TEMP	MIN LMM	LED IM
150225	2X25W	2700K	1000X150X46	2X2078LM/M
150325	2X25W	3000K	1000X150X46	2X2119LM/M
150425	2X25W	4000K	1000X150X46	2X2159LM/M

Materials

100% recyclable, extruded architectural grade T6061 aluminium housing with clear or frosted extruded acrylic lensed body.



Applications

Offices, hospitality, retail, schools, residential and healthcare.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming

- **CRI 95+**

- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K

- **Individual luminaire or continuous runs**

- **Customised wattages**

- **RGB LED boards**

- **Emergency modules**