


SP152



ITEM CODE	WATTAGE	COLOR TEMP	SIZE (MM)	LED LM
152232	32W	2700K	1200X152X63	2848LM/M
152332	32W	3000K	1200X152X63	2903LM/M
152432	32W	4000K	1200X152X63	2971LM/M

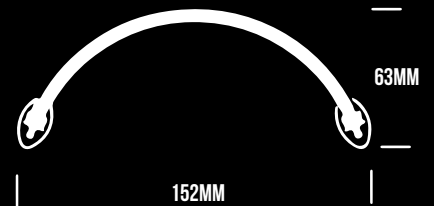

Materials

100% recyclable, extruded architectural grade T6061 aluminium housing with clear or frosted extruded acrylic lensed body.



Applications

Offices, hospitality, retail, schools, residential and healthcare.

Options

- **Dimming:** DALI and DSI dimming
1-10V dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages**
- **RGB LED boards**
- **Emergency modules**
- **Wall mount and suspension brackets**

Features:

Arc profile with 360° light distribution can be used as suspended or wall-scone.

Hollow, illuminated lensed body provides designers a bold new aesthetic form, no light source visible.

52% direct and 48% indirect illumination.

Excellent uniformity with smooth lighting distribution.

MacAdam ellipse 2 ensure colour consistency.

Continuous run with 1200mm or 2400mm sections.

Life: 50,000 hours L90/B10.

