


SWS157

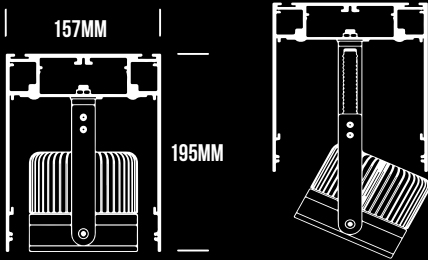

Features:

- Versatile suspended or surface mount 157mm profile with retractable spots.
- Available in 0.5m, 1m, 1.2m, 1.5m, 1.8m or 2.4m lengths.
- Two spots for 0.5m and 4 for 1m length.
- Standard beam angle 38°.
- Extendable pivot up to 25mm.
- Adjustable spot heads 180 degree.
- Surface mount brackets for surface installation.
- Suspension cable for suspended application.
- Life: 50,000 hours L90/B10.

ITEM CODE	WATTAGE	COLOR TEMP	MIN LMM	LED LM
1573418	4X18W	3000K	1000X157X159	4X1890LM
1573426	4X26W	3000K	1000X157X159	4X3170LM
1573439	4X39W	3000K	1000X157X159	4X4320LM
1953450	4X50W	3000K	1000X157X159	4X5170LM

Materials

- 100% recyclable extruded architectural grade T6061 aluminium.
- AL Standard, natural "Ultimate" aluminium
- BK Black powdercoat
- WH White Powdercoat

Applications

Hospitality, schools, art galleries, museums, hospitals, malls, accent lighting, retails and large indoor open areas.

Options

- **Dimming:** DALI or Triac dimming
1-10v dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages**
- **Beam Angle:** 15°, 24°, 48°
- **Emergency modules**