
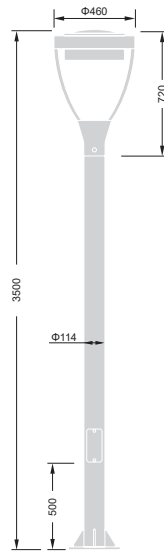


# Stylo Post Top



**Features:**

- Post top amenity luminaire with die cast aluminium housing.
- Corrosion resistance anodised steel pole.
- High purity aluminium anodised reflector for gentle reflected indirect light effect.
- Anti-corrosion powder coating treatment on surface.
- High efficiency optical system for large column spacings.
- Diffuser is made of high-strength clear 4mm thick tempered

toughened glass.

- Stainless steel fasteners and fixing screws.
- No light loss, zero upward lighting to avoid light pollution.
- Easy to install with flange base and anchor bolts.
- Fixture supplied with flange base as standard, anchor bolts kit optional.
- 3000K colour temperature as standard.
- Available colours 3000K, 4000K, 5000K and 6000K optional.
- No IR, No Mercury.



|              |             |             |
|--------------|-------------|-------------|
| Item Code    | 346340      | 346440      |
| Wattage      | 40W         | 40W         |
| Beam Angle   | 120°        | 120°        |
| Colour Temp. | 3000K       | 4000K       |
| LED lm       | 4000lm      | 4600lm      |
| Dim.(mm)     | Φ460 x 3500 | Φ460 x 3500 |

\* Specify for other colour temperatures and pole height.

50,000 hours long life, low maintenance.

**Applications:**

Gardens, Pathways, Walkways, Landscapes, Approach Light, Entrances, Amenity and Car Park Lighting.

**Materials/Finish:**

Extruded aluminium body, die cast aluminium head frame with embedded heat sink, 4mm thick tempered glass diffuser and stainless steel screws.