





# WET63 DI

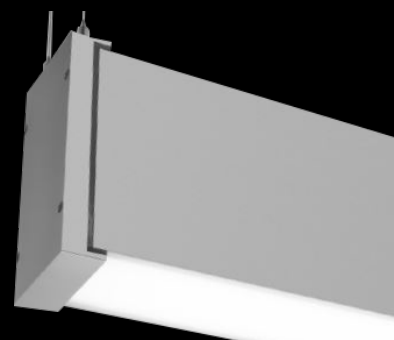

ITEM CODE	WATTAGE	COLOR TEMP	DIM (MM)	LED IM
630274	2X37W	2700K	1000X117X63	4588LM/M
630374	2X37W	3000K	1000X117X63	4668LM/M
630474	2X37W	4000K	1000X117X63	4758LM/M



## Materials

Extruded aluminium body, aluminium sealed end caps. Opal diffuser.



## Applications

Ideal to use in Airports, train stations, bus stations, malls, educational facilities, healthcare, swimming pools, pergolas and exterior applications.

## Options

- **Dimming:** DALI and DSI dimming  
1-10V dimming
- **CRI 95+**
- **Color Temperatures :** 2700K, 3000K, 4000K, 5000K and 6000K
- **Individual luminaire or continuous runs**
- **Customised wattages**
- **RGB LED boards**
- **Emergency modules**
- **IP54**

## Features:

Suspended slim profile completely sealed to IP66 for indoor and outdoor in extreme conditions.

Up and down profile for direct and indirect lighting.

100mm incremental length.

Provides continuous, dot-free homogeneous light output.

Superior quality components for optimum performance.

Plug and play system with factory fitted components for quick installation.

High quality LED modules with CRI85 as standard.

Integral driver.

Extruded architectural grade T6061 aluminium, 100% recyclable.

Life: 50,000 hours L90/B10.